



Installation Instructions

Linear Power Supply Models with CC Case Size


NOTE: Unit may be mounted on any axis. Also, printed circuit board layouts, output terminals (see sheet 1 table), jumper connections, and locations of voltage-adjust potentiometers vary by model.

CAUTION:

The metal case of the TO-3 transistor is an unprotected live circuit connection. Take care to ensure that this device is not shorted to the system chassis upon installation.

CAUTION:

DO NOT CONNECT LOAD LEADS TO SENSE TERMINALS. Sense leads should be left unconnected if remote sense is not required.

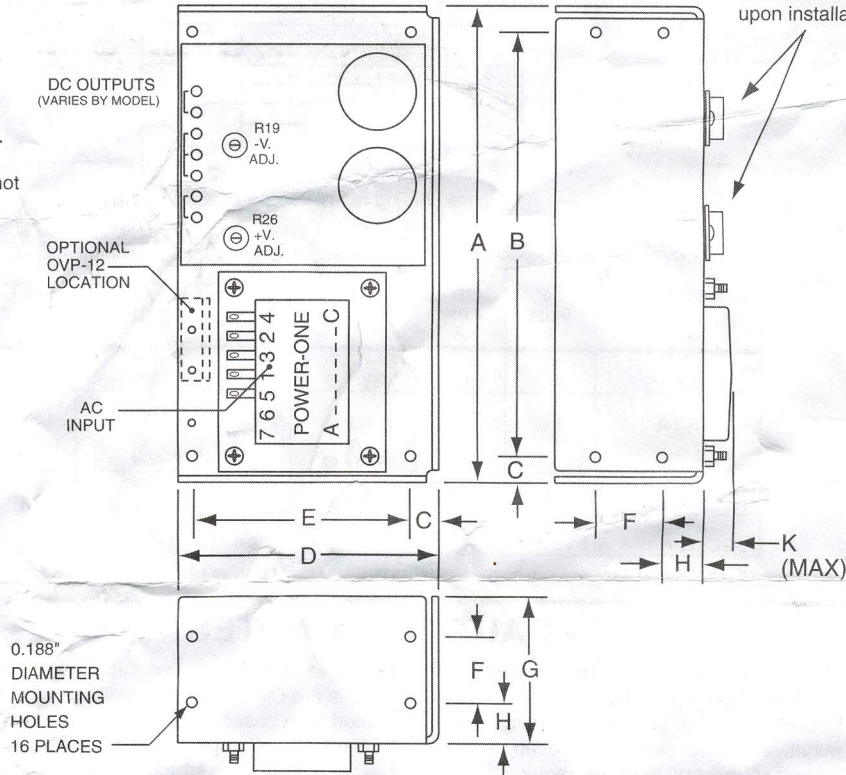

OVERALL SIZE: 9.38" x 4.87" x 3.28"

WEIGHT: 7.0 lb

TOLERANCES: .XX = 0.03" (0.8mm)

.XXX = 0.010" (0.3mm)

INPUT CONNECTIONS: Solder terminals on transformer.

OUTPUT CONNECTIONS: Dual gauge solder turrets on PCB.

CHASSIS: 0.125" aluminum alloy, with clear anodized finish.

| Callout | Inches | Millimeters |
|---------|--------|-------------|
| A | 9.38 | 238.3 |
| B | 8.375 | 212.73 |
| C | 0.50 | 12.70 |
| D | 4.87 | 123.70 |
| E | 4.125 | 104.78 |
| F | 1.250 | 31.75 |
| G | 2.75 | 69.9 |
| H | 0.75 | 19.05 |
| K | 0.53 | 13.46 |

NUCLEAR AND MEDICAL APPLICATIONS - Power-One products are not authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of the respective divisional president of Power-One, Inc.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

Additional application information is available from the Power-One web site at www.power-one.com.

Power-One • 740 CALLE PLANO • CAMARILLO, CA 93012-9951 • PHONE: (805) 987-8741
 P.O. BOX ACKERSTRASSE 56 • CH-8610, USTER, SWITZERLAND • PHONE: (41) 1 944 8383

REV. MAY 18, 2004