

BEAM SPLITTER Tower: location of electrically connected Devices

CODING CONVENTION: The code is divided in 3 fields. The field separator is a dot. The 3th field is used only when more than one device of the same type is hosted on the same suspension stage.

DeviceType . SuspensionStage . DevicePosition (or Function)

M	Motor
MV	Vertical Motor
MH	Horizontal Motor
MA	Angular Motor
TM	TiltMeter
C	Coil
CV	Vertical Coil
CH	Horizontal Coil
T	Temperature probe
AV	Vert. Accelerometer
AH	Hor. Accelerometer
LV	Vertical LVDT
LH	Horizontal LVDT

F0	Filter #0 or top-stage
F1	Filter #1
F2	Filter #2
F3	Filter #3
F4	Filter #4
F7	Filter #7
MA	Marionette
MI	Mirror

1, 2, 3, ...	
L	Left
R	Right
U	Up
D	Down
F	Front
B	Back
UL	Up Left
UR	Up Right
DL	Down Left
DR	Down Right
FR	Front Back
BL	Bottom Left
LL	Lateral Left
LR	Lateral Right
TX	ϑ_x degree of freedom
TZ	ϑ_z degree of freedom
AH1	Hor. Accelerom. #1
AH2	Hor. Accelerom. #2
AH3	Hor. Accelerom. #3
AH4	Hor. Accelerom. #4

Change History

Version	Date	Changes	Author
v1	Nov-Dec 1999	initial suspension cabling	Dattilo, Ceccanti
v2,v3, v3r1	2003	added cabling of sensors and actuators on Filter #7	Dattilo, Nenci
v4	Aug 2014	Modified cabling for allow new separating roof and new payload (cables F,R,S,V). Suppression of cables U and X. No more tiltmeters on F#7, more devices on payload and new F#7 actuation/sensing system.	Berni, Dattilo, Gherardini
v4r1	7 Nov 2014	Updated location of LH.F0.1, updated map of Filter#7, with new drawing by A.Basti	Berni, Dattilo, Gherardini, Nenci

21 MOTORS

code	Location (see also drawings in the following)	vacuum cable ID	vacuum cable type	notes
MV.F0.U	top-screw on F#0	J1	STP, AWG24	MV.1 (old code)
MV.F0	fishing-rod on F#0	A1	STP, AWG24	MV.2
MV.F1	fishing-rod on F#1	B1	STP, AWG24	MV.3
MV.F2	fishing-rod on F#2	C1	STP, AWG24	MV.4
MV.F3	fishing-rod on F#3	D1	STP, AWG24	MV.5
MV.F4	fishing-rod on F#4	E1	STP, AWG24	MV.6
MV.F7	fishing-rod on F#7	F1	STP, AWG24	MV.7
MH.F0.1	trolley on inner structure	H2	STP, AWG24	MH.1
MH.F0.2	trolley on inner structure	H1	STP, AWG24	MH.2
MH.F0.3	trolley on inner structure	H3	STP, AWG24	MH.3
MH.F7.TX	balancing mass on F#7	R3	STP, AWG24	MH.4
MH.F7.TZ	balancing mass on F#7	R2	STP, AWG24	MH.5
MH.MA.TZ	balanc. mass on marion. (for roll motion)	V3		
MH.MA.TX	balanc. mass on marion. (for pitch motion)	V2		
MA.F7.U	F#7 top (for rotation)	R1	STP, AWG24	MA.1
MA.F7.D	F#7 bottom (for rotation)	F4	STP, AWG24	MA.2
M.F0.AH1	Hor. Accelerometer on top-stage	O2	STP, AWG24	
M.F0.AH2	Hor. Accelerometer on top-stage	M2	STP, AWG24	
M.F0.AH3	Hor. Accelerometer on top-stage	N2	STP, AWG24	
M.F0.AV1	Vert. Accelerometer on F#0	K1	STP, AWG24	
M.F0.AV2	Vert. Accelerometer on F#0	L1	STP, AWG24	

n. 23 COILS

code	Location (see also drawings in the following)	vacuum cable ID	vacuum cable type	notes
CH.F0.1 CH.F0.2 CH.F0.3	Safety frame ring	G4 G6 G2	STP, AWG24 (double)	CH.1 CH.2 CH.3
CV.F0.1 CV.F0.2	crossbar on F#0 crossbar on F#0 (fish.rod side)	J3 J2	STP, AWG24	CV.1 CV.2
CH.F7.1	Coil on bottom ring, magnet on F#7	W1	TP, Ø0.6mm, enamel insulat.	coil shared with LH.F7.1 secondary
CH.F7.2	Coil on bottom ring, magnet on F#7	W5	TP, Ø0.6mm, enamel insulat	coil shared with LH.F7.2 secondary
CH.F7.3	Coil on bottom ring, magnet on F#7	W3	TP, Ø0.6mm, enamel insulat	coil shared with LH.F7.3 secondary
CV.F7.1	Coil on bottom ring, magnet on F#7	W2	TP, Ø0.6mm, enamel insulat	coil shared with LV.F7.1 secondary
CV.F7.2	Coil on bottom ring, magnet on F#7	W6	TP, Ø0.6mm, enamel insulat	coil shared with LV.F7.2 secondary
CV.F7.3	Coil on bottom ring, magnet on F#7	W4	TP, Ø0.6mm, enamel insulat	coil shared with LV.F7.3 secondary
CV.MA.B CV.MA.L CH.MA.BL CH.MA.FR CV.MA.F CV.MA.R CH.MA.BR CH.MA.FL	coils on F#7 lower frame (cage), magnets on Marionette	cable S (see details on NE_LastStageCabling file)		
CH.MI.UR CH.MI.DR CH.MI.UL CH.MI.DL	coils on F#7 lower frame (cage), magnets on Mirror	cable V (see details on NE_LastStageCabling file)		

6 (couples of) THERMAL PROBES

code	location	vacuum cable ID	vacuum cable type	notes
T.F0.1 T.F0.2	antispring back on F#0	A2	STP, AWG24	TP.1
T.F1.1 T.F1.2	antispring back on F#1	B2	STP, AWG24	TP.2
T.F2.1 T.F2.2	antispring back on F#2	C2	STP, AWG24	TP.3
T.F3.1 T.F3.2	antispring back on F#3	D2	STP, AWG24	TP.4
T.F4.1 T.F4.2	antispring back on F#4	E2	STP, AWG24	TP.5
T.F7.1 T.F7.2	antispring back on F#7	F2	STP, AWG24	TP.6

5 ACCELEROMETERS

code	Location <i>(see also drawings in the following)</i>	vacuum cable ID	vacuum cable type	notes
AH.F0.1	top-ring	O2	STP, AWG24	AH.1
AH.F0.2	top-ring	M2	STP, AWG24	AH.2
AH.F0.3	top-ring	N2	STP, AWG24	AH.3
AV.F0.1	crossbar F#0	K1	STP, AWG24	AV.1
AV.F0.2	crossbar F#0 (fish.rod side)	L1	STP, AWG24	AV.2

3 PIEZOs

code	Location <i>(see also drawings in the following)</i>	vacuum cable ID	vacuum cable type	notes
PZ.BR.1	IP foot	Q1	STP, AWG24	
PZ.BR.2	IP foot	Q2	STP, AWG24	
PZ.BR.3	IP foot	Q3	STP, AWG24	

Total number of conductors for PIEZOs: 9.


Total STP for CLOSED-LOOP PIEZOs: 3.

18 LVDTs

code	Location (see also drawings in the following)	vacuum cable ID	vacuum cable type	notes
LH.F0.1	Primary on top-ring	O1	STP, AWG24	LH.1
	Secondary on inner structure	G1	STP, AWG24	
LH.F0.2	Primary on top-ring	M1	STP, AWG24	LH.2
	Secondary on inner structure	G5	STP, AWG24	
LH.F0.3	Primary on top-ring	N1	STP, AWG24	LH.3
	Secondary on inner structure	G1	STP, AWG24	
LV.F0	primary on F#0 crossbar	J4	STP, AWG24	LV.1
	secondary on F#0 body	A3	STP, AWG24	
LV.F1	F#1	B3	STP, AWG24	LV.2
LV.F2	F#2	C3	STP, AWG24	LV.3
LV.F3	F#3	D3	STP, AWG24	LV.4
LV.F4	F#4	E3	STP, AWG24	LV.5
LV.F7	F#7	F3	STP, AWG24	LV.6
LH.F7.1	Primary on bottom ring, Secondary on bottom ring ferrites on F#7	T1 W1	TP, Ø0.6mm, enamel insulat.	secondary shared with CH.F7.1
LH.F7.2	Primary on bottom ring, Secondary on bottom ring ferrites on F#7	T5 W5	TP, Ø0.6mm, enamel insulat	secondary shared with CH.F7.2
LH.F7.3	Primary on bottom ring, Secondary on bottom ring ferrites on F#7	T3 W3	TP, Ø0.6mm, enamel insulat	secondary shared with CH.F7.3
LV.F7.1	Primary on bottom ring, Secondary on bottom ring ferrites on F#7	T2 W2	TP, Ø0.6mm, enamel insulat	secondary shared with CV.F7.1
LV.F7.2	Primary on bottom ring, Secondary on bottom ring ferrites on F#7	T6 W6	TP, Ø0.6mm, enamel insulat	secondary shared with CV.F7.2
LV.F7.3	Primary on bottom ring, Secondary on bottom ring ferrites on F#7	T4 W4	TP, Ø0.6mm, enamel insulat	secondary shared with CV.F7.3
LV.BR.1	Primary on ground	P1	STP, AWG26	new (AdV)
	Secondary on IP foot	P2		
LV.BR.2	Primary on ground	P5	STP, AWG26	new (AdV)
	Secondary on IP foot	P6		
LV.BR.3	Primary on ground	P3	STP, AWG26	new (AdV)
	Secondary on IP foot	P4		



F#0 / TOP-STAGE devices

top view

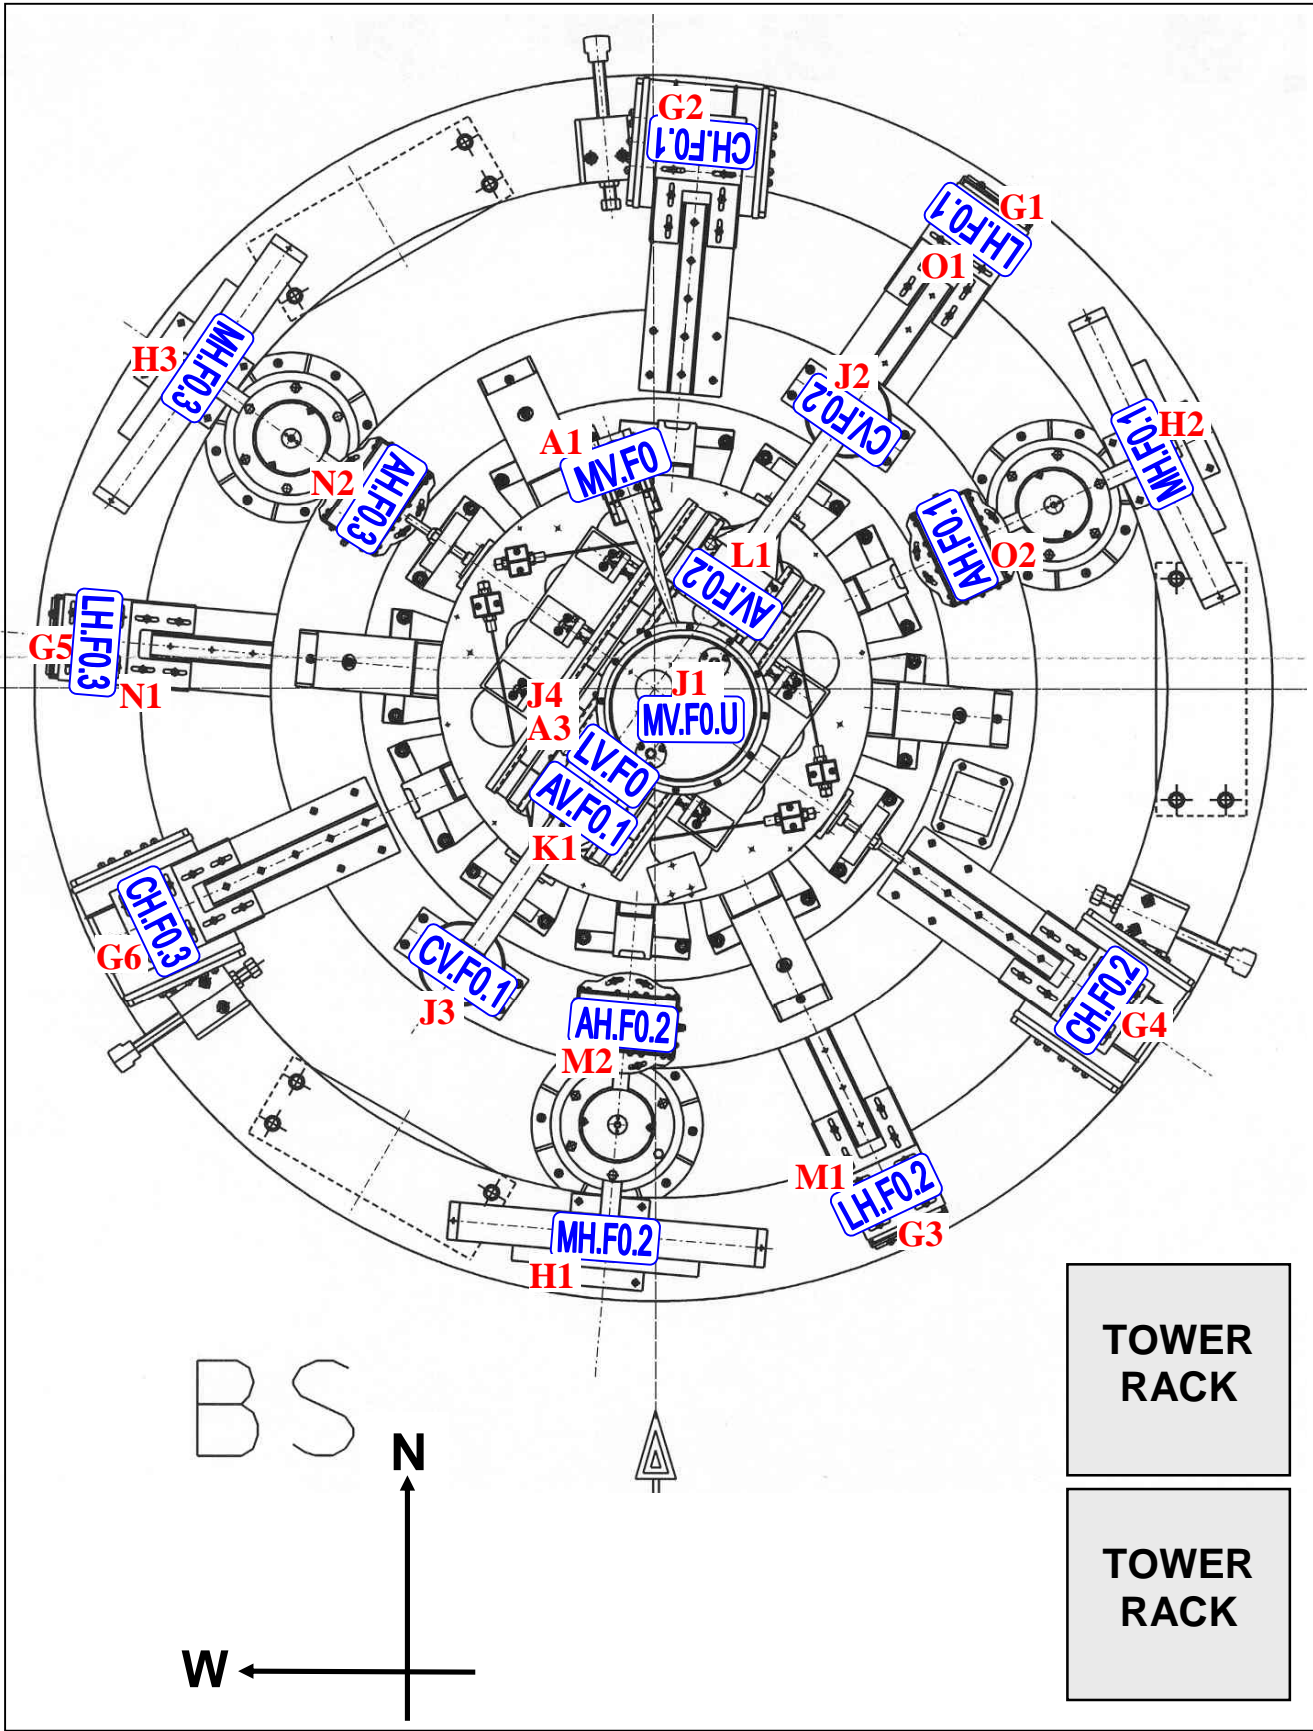


FILTER #7 (upper part) devices

top view

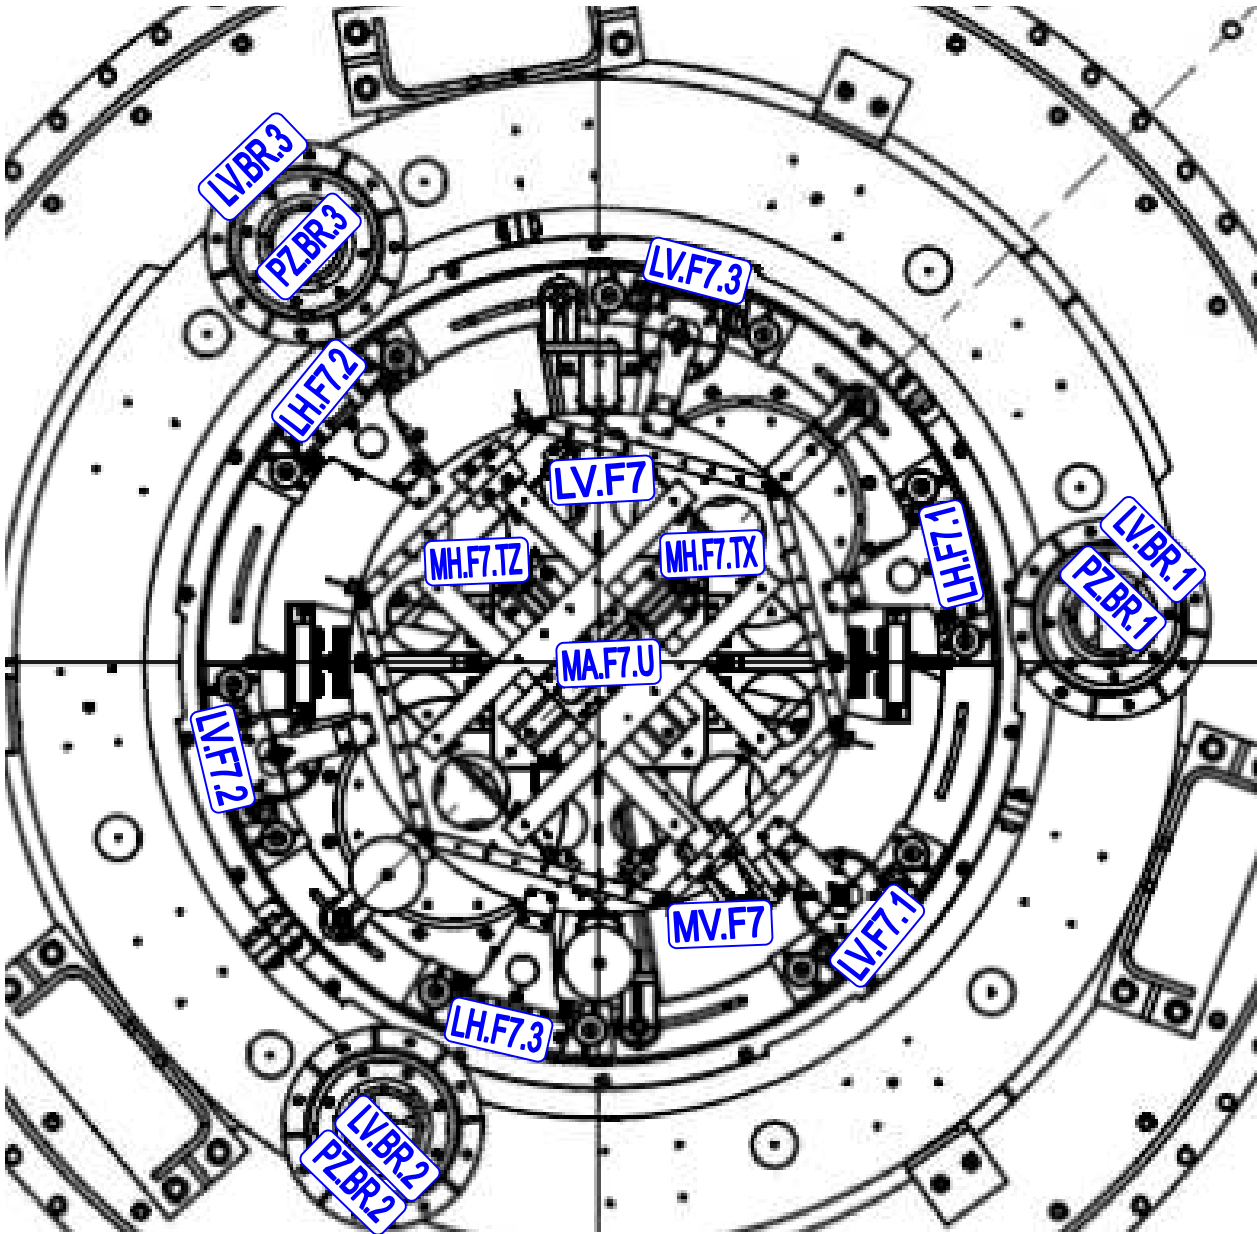


Cable arrangement along inverted pendulum (IP) legs and safety structure (SF) legs

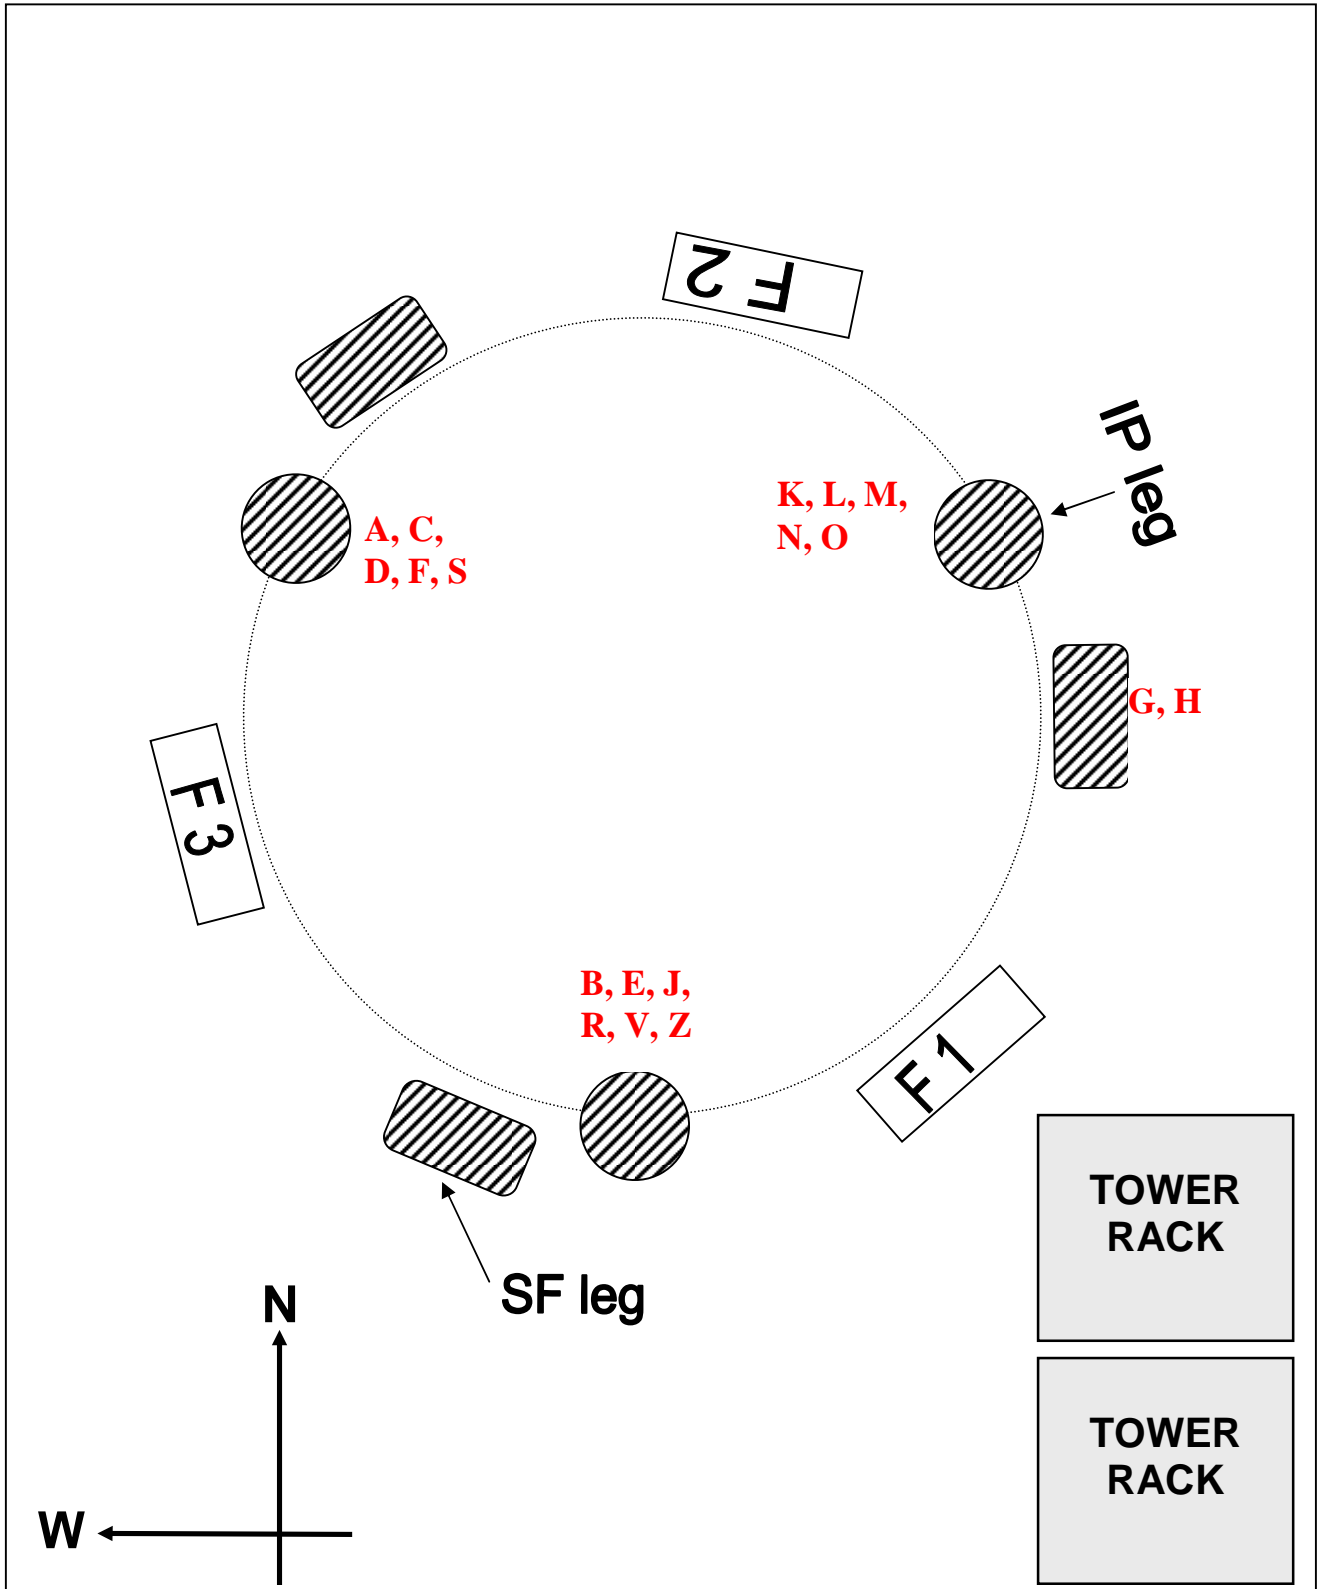


Connector location on flanges

Flange **F1**
(air side view)

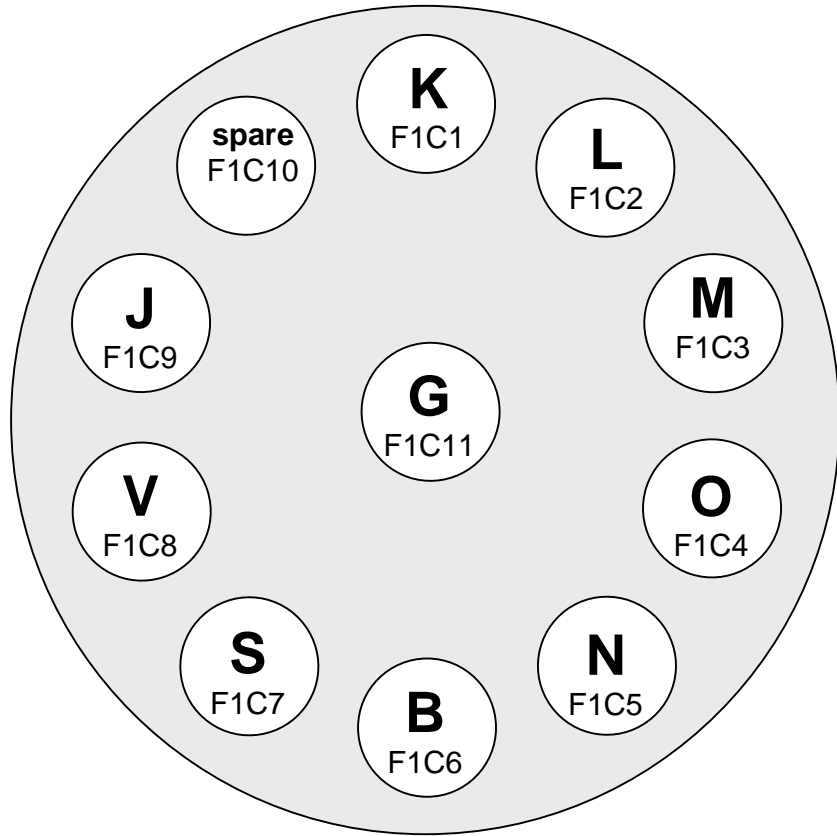

Flange **F2**
(air side view)

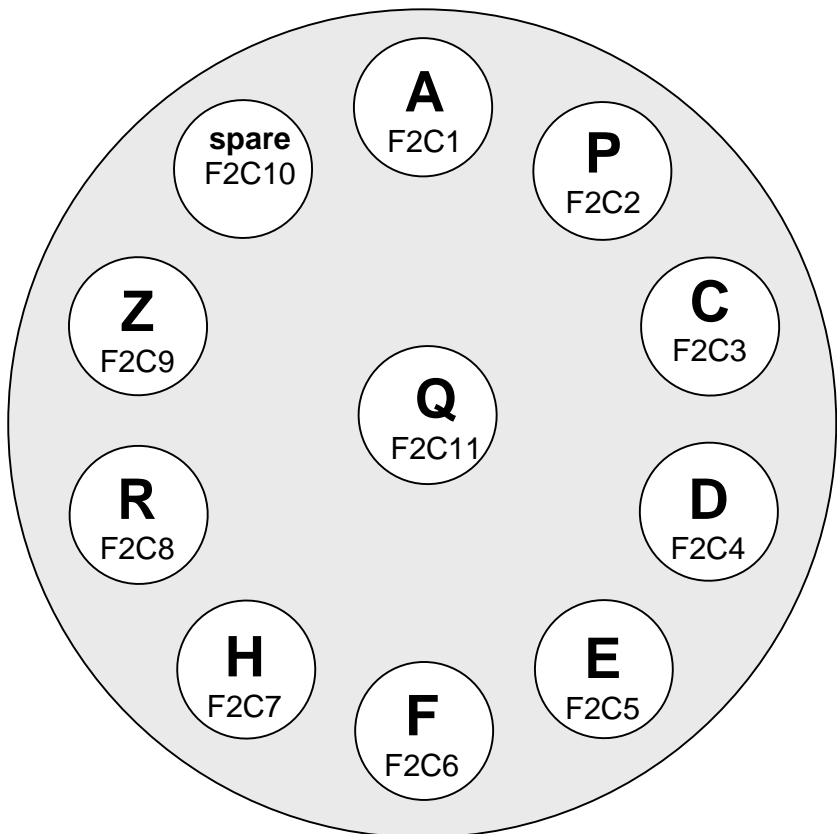

Feed-through location on the flange of the tower base**Flange F4**

(air side view)

It is located on the South side, up-right
(flange labeled "E" by the manufacturer)

